


PROFESSIONAL SPECIFICATION | INDICATIVE TECHNICAL DATA

Breccia Portoro Marble

Natural-stone reference selected by Marbre Import for architectural, interior and bespoke fabrication projects. Colour, veining and technical performance must be confirmed against the actual lot offered.

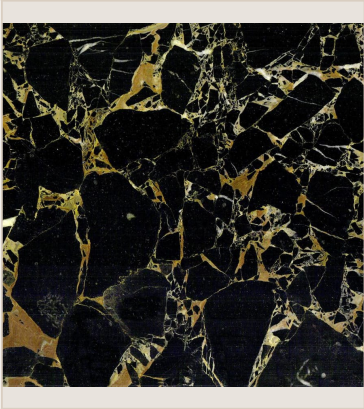

STONE FAMILY	Natural marble
ORIGIN / QUARRY AREA	Italy
APPEARANCE	Deep black with expressive gold veining
PREDOMINANT COLOUR	Black
FORMATS AND FINISHES	Slabs, tiles and bespoke cut-to-size pieces. Available finishes include polished, honed, leathered/brushed and other project-specific options.
RECOMMENDED APPLICATIONS	Premium interior and architectural applications
EXTERIOR USE	Subject to the selected lot, finish, climate and intended application

Indicative technical properties

Bulk density	~ 2,650-2,750 kg/m³
Water absorption	~ 0.10-0.50%
Compressive strength	~ 80-140 MPa
Flexural strength	~ 8-18 MPa
Freeze-thaw / exterior use	Subject to the selected lot and finish

SPECIFICATION NOTES

Approve the actual lot, finish, thickness, dimensions and vein layout before ordering. Performance ranges are indicative and may vary by quarry, batch and test method. Confirm suitability for exterior, wet-area, kitchen, façade or high-traffic use with the project team.

NON-CONTRACTUAL DOCUMENT - Natural variation is inherent to stone. Values, colour, movement and availability must be confirmed for the selected lot.