


PROFESSIONAL SPECIFICATION | INDICATIVE TECHNICAL DATA

# Coloured Onyx

Natural-stone reference selected by Marbre Import for architectural, interior and bespoke fabrication projects. Colour, veining and technical performance must be confirmed against the actual lot offered.

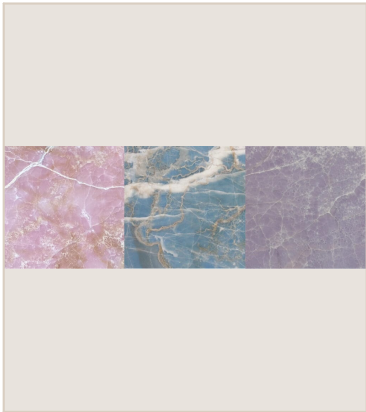

|                          |                                                                                                                                                |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| STONE FAMILY             | Natural onyx                                                                                                                                   |
| ORIGIN / QUARRY AREA     | Spain                                                                                                                                          |
| APPEARANCE               | Blue, pink and violet tones over natural veining                                                                                               |
| PREDOMINANT COLOUR       | Blue and pink                                                                                                                                  |
| FORMATS AND FINISHES     | Slabs, tiles and bespoke cut-to-size pieces. Available finishes include polished, honed, leathered/brushed and other project-specific options. |
| RECOMMENDED APPLICATIONS | Premium decorative applications                                                                                                                |
| EXTERIOR USE             | Subject to the selected lot, finish, climate and intended application                                                                          |

## Indicative technical properties

|                            |                          |
|----------------------------|--------------------------|
| Bulk density               | ~ 2,600-2,750 kg/m³      |
| Water absorption           | ~ 0.10-0.50%             |
| Compressive strength       | ~ 80-140 MPa             |
| Flexural strength          | ~ 8-15 MPa               |
| Freeze-thaw / exterior use | Interior use recommended |

### SPECIFICATION NOTES

Approve the actual lot, finish, thickness, dimensions and vein layout before ordering. Performance ranges are indicative and may vary by quarry, batch and test method. Confirm suitability for exterior, wet-area, kitchen, façade or high-traffic use with the project team.

NON-CONTRACTUAL DOCUMENT - Natural variation is inherent to stone. Values, colour, movement and availability must be confirmed for the selected lot.