


PROFESSIONAL SPECIFICATION | INDICATIVE TECHNICAL DATA

G603 Granite

Natural-stone reference selected by Marbre Import for architectural, interior and bespoke fabrication projects. Colour, veining and technical performance must be confirmed against the actual lot offered.

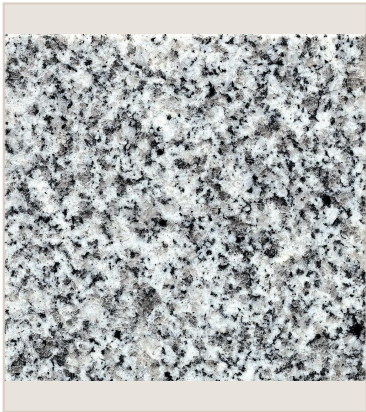

STONE FAMILY	Natural granite
ORIGIN / QUARRY AREA	Fujian, China
APPEARANCE	Light grey-white, fine and relatively uniform grain
PREDOMINANT COLOUR	Light grey
FORMATS AND FINISHES	Slabs, tiles and made-to-measure pieces. Available finishes include polished, honed, flamed, brushed and project-specific alternatives.
RECOMMENDED APPLICATIONS	Interior and exterior applications
EXTERIOR USE	Subject to the selected lot, finish, climate and intended application

Indicative technical properties

Bulk density	~ 2 600 - 2 850 kg/m³
Water absorption	~ 0.10-0.40%
Compressive strength	~ 120 - 250 MPa
Flexural strength	~ 10 - 20 MPa
Freeze-thaw / exterior use	Generally favourable, subject to project validation

SPECIFICATION NOTES

Approve the actual lot, finish, thickness, dimensions and vein layout before ordering. Performance ranges are indicative and may vary by quarry, batch and test method. Confirm suitability for exterior, wet-area, kitchen, façade or high-traffic use with the project team.

NON-CONTRACTUAL DOCUMENT - Natural variation is inherent to stone. Values, colour, movement and availability must be confirmed for the selected lot.