


PROFESSIONAL SPECIFICATION | INDICATIVE TECHNICAL DATA

Kanfanar Limestone

Natural-stone reference selected by Marbre Import for architectural, interior and bespoke fabrication projects. Colour, veining and technical performance must be confirmed against the actual lot offered.

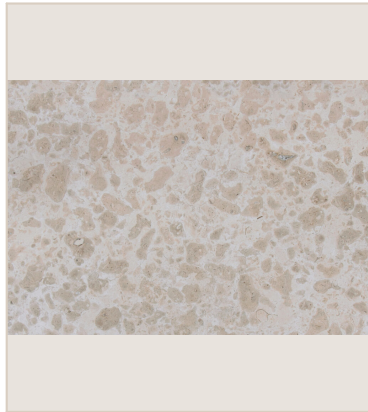

STONE FAMILY	Natural stone / limestone
ORIGIN / QUARRY AREA	Istria, Croatia
APPEARANCE	Beige, cream to light grey, with mineral variation and possible shell inclusions depending on the quarry layer
PREDOMINANT COLOUR	Light beige
AVAILABLE VARIETIES	Kanfanar Nuts, Kanfanar Blue, Kanfanar Shells, Kanfanar layer II, Kanfanar layer III, Kanfanar layer IV / vein cut
FORMATS	Slabs, paving, tiles, stair components, cladding, solid elements and bespoke fabrication subject to availability
AVAILABLE FINISHES	Polished, honed, brushed, flamed, sandblasted, bush-hammered, aged, rigato/grooved or grafiato, depending on the quarry layer and project
RECOMMENDED APPLICATIONS	Interior floors, wall cladding, façades, stairs, exterior landscaping, residential and hospitality projects
EXTERIOR USE	Possible subject to the selected finish, thickness, installation method, climate, treatment and lot approval

Indicative technical properties

Bulk density	~ 2 636 kg/m³
Water absorption	~ 0.8% by mass
Compressive strength	~ 128-133 MPa
Flexural strength	~ 14.9 MPa
Abrasion resistance	~ 19.1
Freeze-thaw / exterior use	Confirm for the selected lot, finish, thickness, installation method and exposure

SPECIFICATION NOTES

Approve the actual lot, finish, thickness, dimensions and vein layout before ordering. Performance ranges are indicative and may vary by quarry, batch and test method. Confirm suitability for exterior, wet-area, kitchen, façade or high-traffic use with the project team.

NON-CONTRACTUAL DOCUMENT - Natural variation is inherent to stone. Values, colour, movement and availability must be confirmed for the selected lot.