


PROFESSIONAL SPECIFICATION | INDICATIVE TECHNICAL DATA

Sunny Limestone

Natural-stone reference selected by Marbre Import for architectural, interior and bespoke fabrication projects. Colour, veining and technical performance must be confirmed against the actual lot offered.

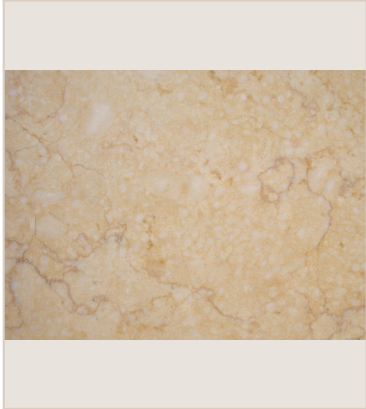

STONE FAMILY	Natural limestone
ORIGIN / QUARRY AREA	Egypt
APPEARANCE	Golden beige with visible fossil detail
PREDOMINANT COLOUR	Golden beige
FORMATS AND FINISHES	Slabs, tiles and made-to-measure pieces. Available finishes include polished, honed, brushed and project-specific alternatives.
RECOMMENDED APPLICATIONS	High-end interior applications
EXTERIOR USE	Subject to the selected lot, finish, climate and intended application

Indicative technical properties

Bulk density	~ 2 300 - 2 700 kg/m³
Water absorption	~ 0.50-3.00%
Compressive strength	~ 40 - 120 MPa
Flexural strength	~ 5 - 12 MPa
Freeze-thaw / exterior use	Subject to porosity, finish and project-specific testing

SPECIFICATION NOTES

Approve the actual lot, finish, thickness, dimensions and vein layout before ordering. Performance ranges are indicative and may vary by quarry, batch and test method. Confirm suitability for exterior, wet-area, kitchen, façade or high-traffic use with the project team.

NON-CONTRACTUAL DOCUMENT - Natural variation is inherent to stone. Values, colour, movement and availability must be confirmed for the selected lot.